

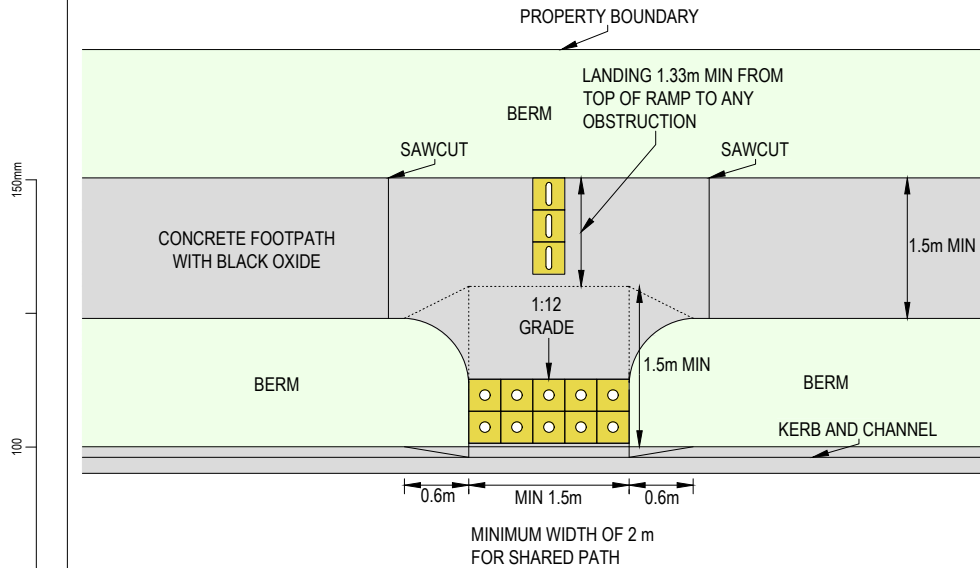
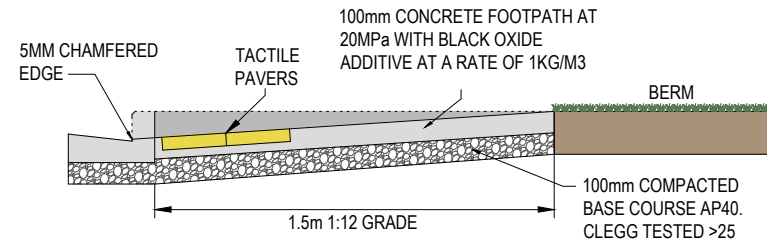


BERM ADJACENT TO KERB

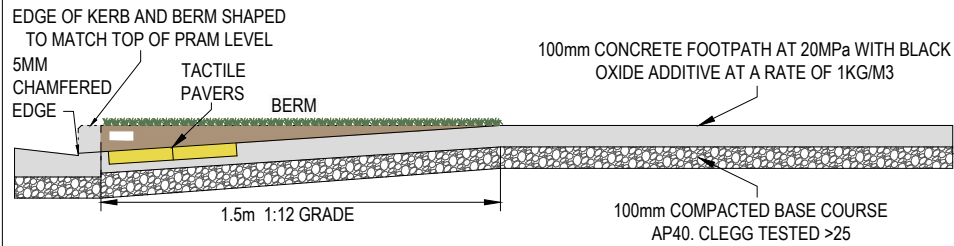

FOOTPATH ADJACENT TO KERB

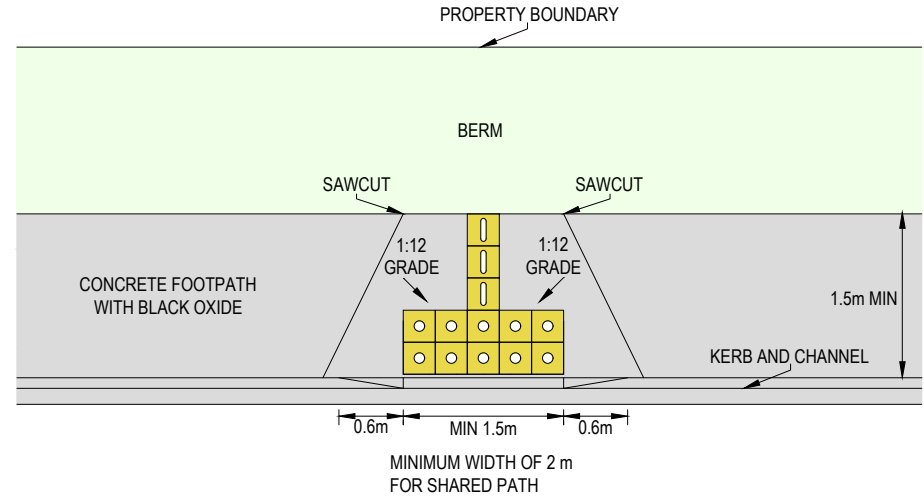

NOTE:

1. CONCRETE FOOTPATH AND KERB SAW CUT EXPANSION JOINT EVERY 3 METRES.
2. CONCRETE FOOTPATH TO BE 20MPa.
3. BLACK OXIDE AT A RATE OF 1KG/M3.
4. BASE COURSE COMPACTED AP40 AND CLEGG TESTED >25.
5. PEDESTRIAN RAMPS AND CROSSING TACTILE PAVERS TO LTNZ RTS14 GUIDELINES.
6. LOCATION TO BE AGREED AND APPROVED BY A COUNCIL ENGINEER.
7. TACTILE PAVERS 300X300X60mm.
8. PRE POUR INSPECTION IS REQUIRED



STANDARD DETAILS

TYPICAL PEDESTRIAN KERB RAMPS

Drawn	Designed	
J. GOODMAN		
Approved	Revision Date	
G. O'CONNOR	OCTOBER 2020	
Scale	Drawing No.	Revision
NOT TO SCALE	KCDC-RD-004	R4