

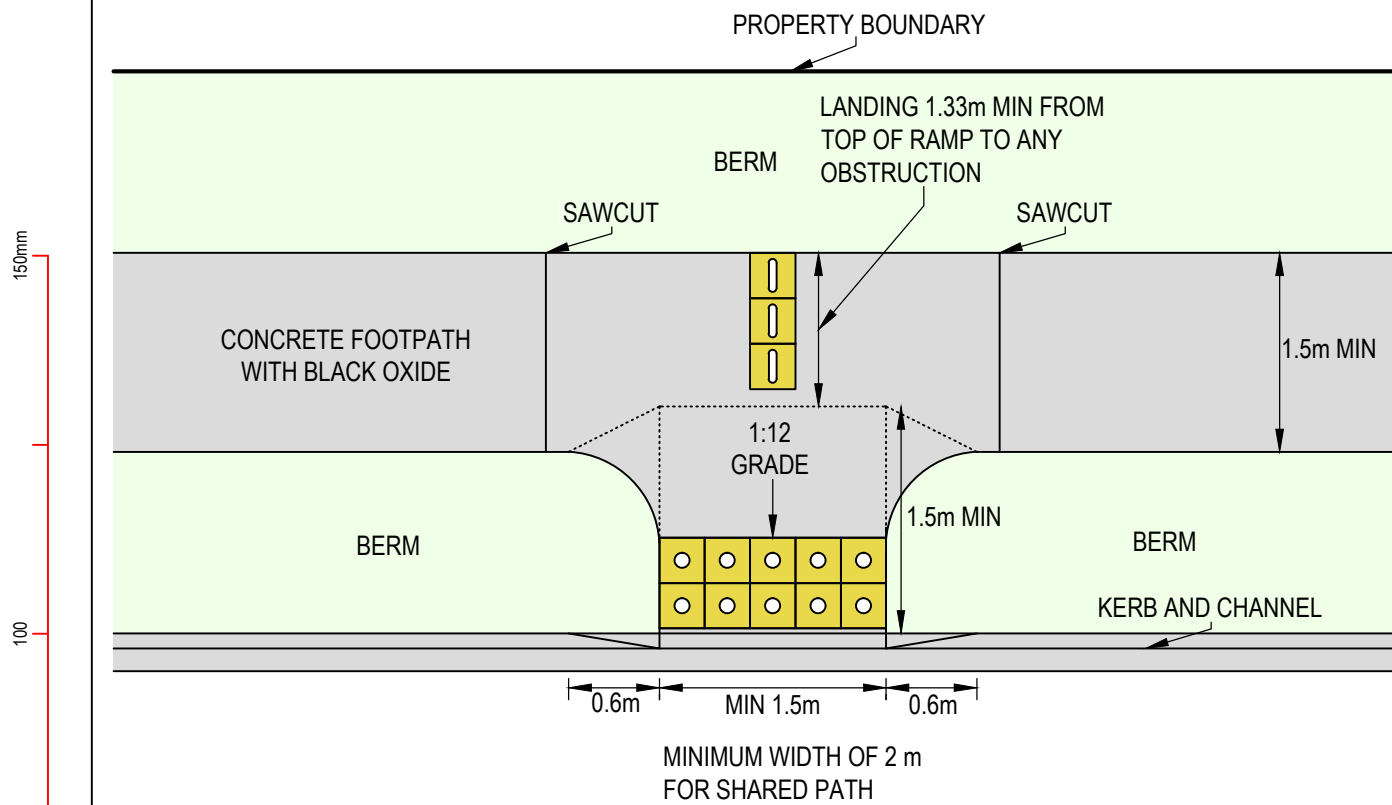
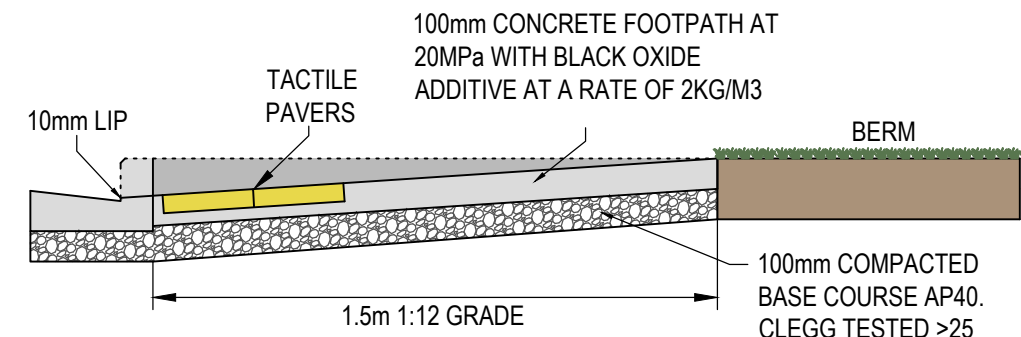


BERM ADJACENT TO KERB

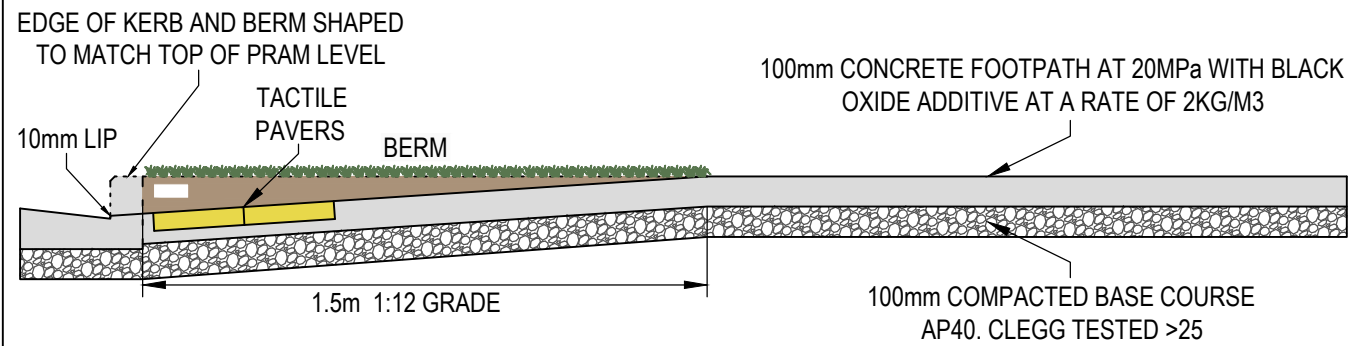

FOOTPATH ADJACENT TO KERB

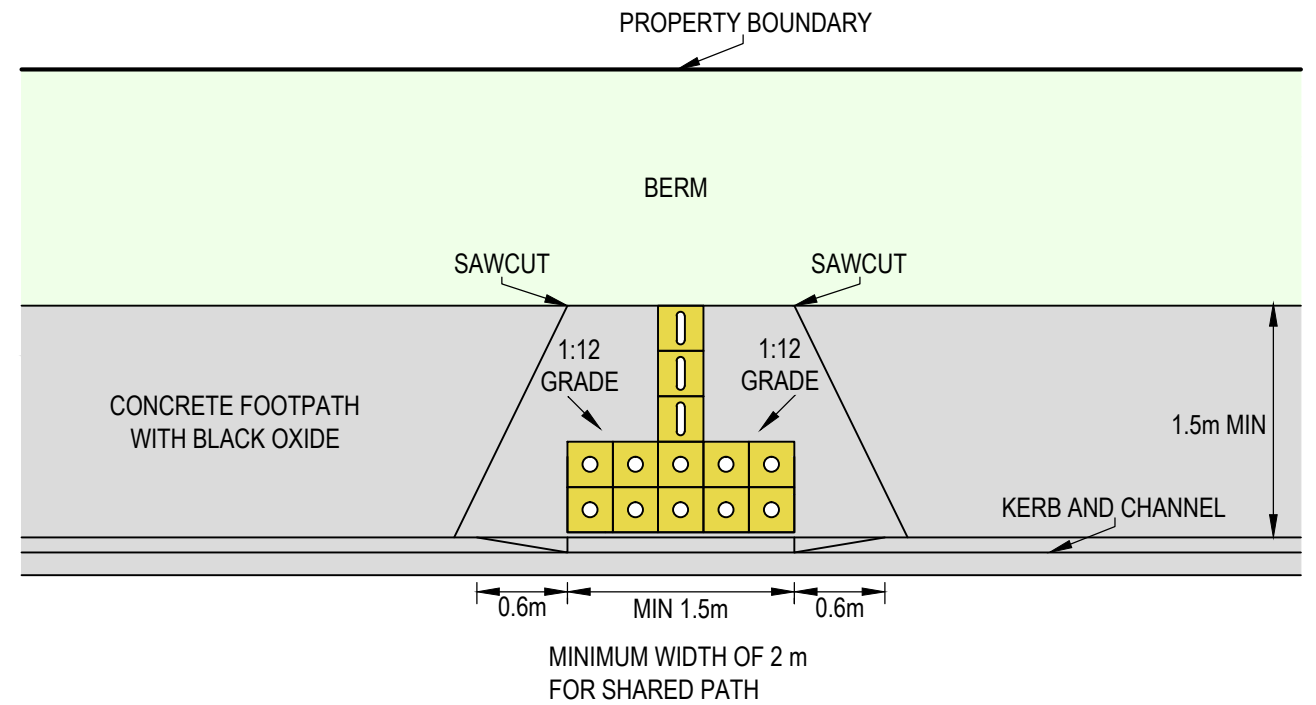

NOTE:

1. CONCRETE FOOTPATH AND KERB SAW CUT EXPANSION JOINT EVERY 3 METRES.
2. CONCRETE FOOTPATH TO BE 20MPa.
3. BLACK OXIDE AT A RATE OF 2KG/M3.
4. BASE COURSE COMPACTED AP40 AND CLEGG TESTED >25.
5. TACTILE PAVERS TO LTNZ RTS14 GUIDELINES.
6. LOCATION TO BE AGREED AND APPROVED BY A COUNCIL ENGINEER.
7. TACTILE PAVERS 300X300X60mm.



STANDARD DETAILS

TYPICAL PEDESTRIAN KERB RAMPS

Drawn	Designed	
T.GE		
Approved	Revision Date	
N.ITJESHORST	MARCH 2018	
Scale	Drawing No.	Revision
NOT TO SCALE	KCDC-RD-004	R3