



Kāpiti Island viewed from coast road south of Paekākāriki

Paekākāriki coastal hazards

SUMMARY

Key findings

- Assuming that existing seawalls are not replaced in the future or alternative protection measures implemented, the Paekākāriki shoreline is projected to be susceptible to coastal erosion over the next 30–100 years.
- In general, existing seawalls currently provide good protection from coastal erosion, but the beach in front of them could lower 0.8 to 2.6m over the next 30 years as a result of relative sea level rise (RSLR), which could cause them to fail.
- Paekākāriki is the second most vulnerable area in the district based on the number of private land parcels potentially affected by coastal erosion.
- Paekākāriki is less susceptible to coastal flooding due to the higher land elevation of this section of coast. Flooding is localized to the Wainui Stream and Waikakariki Stream mouth areas.

Paekākāriki coastal environment

Paekākāriki is at the southern end of a coastal plain which narrows to less than 200m wide at the base of the coastal escarpment and Paekākāriki Hill. Coastal processes in Paekākāriki are influenced by the shape of the coast at Paraparaumu, which extends west of the rest of the shoreline in a large delta shape. This acts as a natural barrier to longshore sediment transport, reducing the sediment supply to the Paekākāriki shoreline. As a result, the beach has experienced periodic large-scale erosion in significant storms. People have responded by building a near continuous line of ad hoc public and private coastal protection structures (seawalls) since at least the 1950s. The structures vary in length, type, and age – mostly rock (as shown in photos A and C) and timber seawalls, with a few railway iron and tyre structures. South of The Parade, there is only a small buffer between properties and the shoreline.

Coastal hazards

Present-day erosion and flood hazards

The present-day erosion hazard is what could occur in an extremely large storm (which has a 1% chance of occurring each year in the immediate/near future), and if the existing protection structures failed, as shown in photo (B). Along the Paekākāriki coast, short term erosion is 'most likely' to be 7 to 20m of erosion.

Due to the high land elevations in Paekākāriki, the present-day flood hazard in the same size event is very minimal and localized to the Wainui Stream and Waikakariki Stream mouths.



A. Rock revetment structure along The Parade.



B. Structure failure and coastal erosion following September 1976 storm.



C. Paekākāriki seawall at Beach Road.

Future coastal erosion hazard

Future projections of shoreline position take into account the presence of current protection structures up to their estimated remaining life (10–50 years). After this it is assumed that the structures are not replaced, alternative protection measures are not implemented, and the beach reverts to a natural system.

Northern Paekākāriki

Paekākāriki seawall assumed to have at least a 30 year lifetime.

Projected to erode:

- 8 to 12 m by 2050
- 17 to 30 m by 2070
- 38 to 96 m by 2120

Central Paekākāriki

Seawall lifetimes vary from 10–30 years along this section.

Projected to erode:

- 23 to 31 m by 2050
- 30 to 47 m by 2070
- 50 to 100 m by 2120

Southern Paekākāriki


Seawalls are assumed to last for the next 50 years.

Projected to erode:

- 8 m by 2050
- 8 m by 2070
- 30 to 72 m by 2120

Wainui Stream

Waikakariki Stream

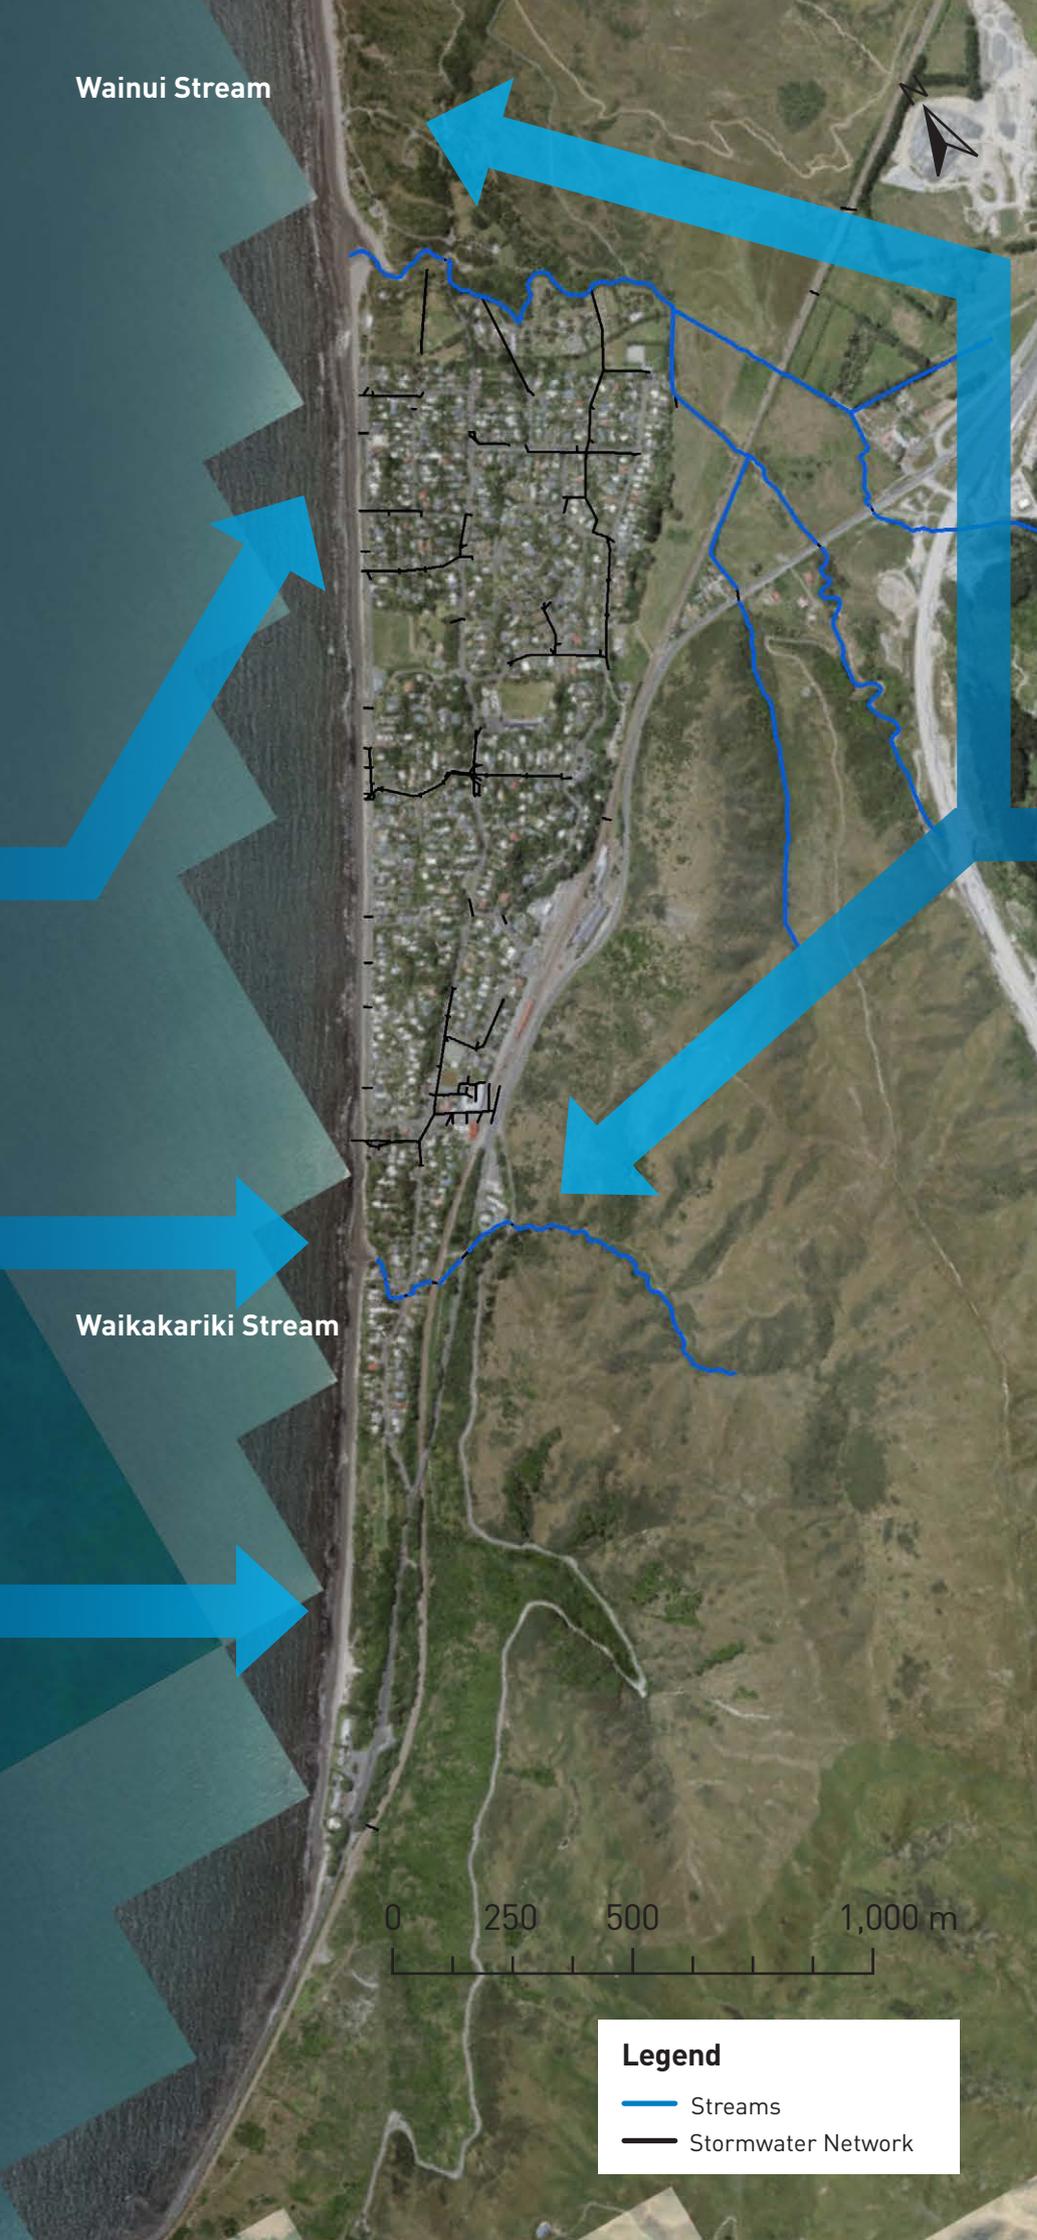

Future coastal flood hazard

Pathways to coastal flooding in Paekākāriki are along the Wainui and Waikakariki Streams. The stormwater drainage network in Paekākāriki is generally raised well above the highest extreme sea level considered in this assessment.

0.4 m and 0.65 m RSLR

Future flood hazard under lower RSLR scenarios is around the mouths of the Wainui and Waikakariki Streams.

1.65 m RSLR

Flooding is still mostly localized around the two stream mouths. The mapping shows some localized depressions within the Paekākāriki settlement, which could be susceptible to flooding from stormwater outfalls, but are generally protected by higher surrounding ground levels.

There is a small area around both stream mouths where there could be additional flooding caused by wave run-up.

Legend

-  Streams
-  Stormwater Network



Vulnerability

Over the next 30 years, a total of 45–46 private land parcels could be affected by erosion; 83–148 over the next 50 years; and 149–245 over the next 100 years. The Parade is projected to be affected by erosion within 50 years, and parts of Ames street are projected to be affected in 100 years. State Highway 1 is projected to become affected following the assumed failure of the protection structure after 50 years. 15 coastal stormwater outlets in Paekākāriki are vulnerable to the coastal erosion hazard within the next 30 years.

Vulnerability to coastal flooding in Paekākāriki is significantly less than vulnerability to coastal erosion, with no critical council or community infrastructure mapped to be affected. 41 private land parcels are considered affected by flooding in an extreme storm at the present day, and this increases by 25 land parcels under the highest RSLR scenario in 100 years. It should be noted that the count for land parcels includes land parcels along the shoreline where the seaward boundary currently extends into the sea.



How these hazards have been assessed for Paekākāriki

Coastal science experts from Jacobs assessed the susceptibility and vulnerability of coastal erosion and flooding hazards across the entire Kāpiti District.

Government guidance recommends councils include the high [RCP8.5H+] scenario to stress-test adaptation options, and future-proof 'greenfield' developments (new suburbs and towns) and major infrastructure.

Coastal erosion

The components used to calculate a potential coastal erosion distance along the Paekākāriki coastline include:

- the natural long-term trend of the shoreline movement (i.e. eroding, growing, or stable)
- the amount of erosion which could occur as a direct result of the rise in sea levels compared to land level (termed the Relative Sea Level Rise (RSLR)) over time frames of 30, 50, and 100 years
- short-term storm erosion from an extremely large storm which has approximately a 1% chance of occurring in each year, based on observations from the September 1976 storm, and

- erosion from dunes restabilizing to their natural stable slope following a large storm.

Jacobs used a 'probabilistic approach' to tie likelihoods to the erosion distances calculated for each scenario of RSLR. The '*most likely*' range of shoreline positions has a 33–66% chance of occurring. The '*unlikely*' shoreline position is where there is a 10% chance that the erosion would reach or be greater than this position.

Coastal flooding

To assess the coastal flood hazard for Paekākāriki Jacobs mapped the area which is susceptible to flooding by a large storm tide which has a 1% chance of occurring in any year. The maps show the flooding that could occur at the present time and in the future, for RSLR scenarios of +0.4 m; +0.65 m; +0.85 m; 1.25 m and +1.65 m. Jacobs used a simple 'bathtub' approach, where all land below the storm tide water level is mapped as susceptible to flooding, regardless of connection to the sea. The maps also show areas which could be affected by additional flooding due to wave run-up overtopping the dunes.



Full report at kapiticoast.govt.nz/coastal-science