


STANDARD ACCESS **BERM**

STANDARD ACCESS **CARRIAGEWAY**

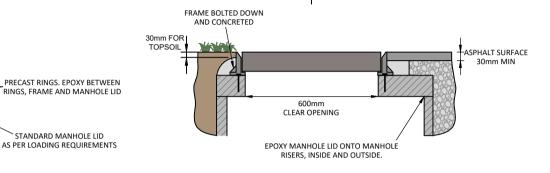

JOINT DETAIL - EPOXY MORTAR OR APPROVED ALTERNATIVE EPOXY MORTAR OR APPROVED ALTERNATIVE -BM100 OR SM9020 SEALING STRIP

600mm

CLEAR OPENING


RAISED ACCESS

CARRIAGEWAY

FRAME BOLTED DOWN

STANDARD MANHOLE LID

EPOXY MANHOLE LID ONTO MANHOLE RISERS, INSIDE AND OUTSIDE.



PLAN

NOTE:

g-

- MAX DISTANCE TO 1ST MANHOLE STEP FROM LID 550mm.
- 2. 300mm DISTANCE BETWEEN STEPS.
- MAX DISTANCE TO STEP FROM MANHOLE BENCHING 300-450mm MAX AT BASE OF MANHOLE.
- 4. STEPS TO FINISH ABOVE BENCHING WHERE POSSIBLE.



STANDARD	DETAILS

MANHOLE DETAILS

Drawn	Designed	
A. KOCHAR	J. SAXTON	
Approved	Revision Date	
M. COLE	APRIL 2021	
Scale	Drawing No.	Revision
NOT TO SCALE	KCDC-CM-008	R3